

Project Catalyst Report

Wireless Moisture Sensors

Grower Information

Grower Name:	Peter McDonnell
Entity Name:	Sunrice
Trial Farm No/Name:	BKN-08168A
Mill Area:	Pioneer
Total Farm Area ha:	36.7ha
No. Years Farming:	2
Trial Subdistrict:	Colevale
Area under Cane ha:	30.7ha

Trial Status

- Continuing

Background Information

Aim:

This project aims develop a low cost wireless moisture sensor that can be installed in the middle of a canefield and transmit wirelessly back to a basestation which will then display values on a website. There will be one sensor placed in each individual paddock of a farm, and the data will be displayed on the Farmacist Connect website colour coded by KPA values allowing grower to determine areas of moisture stress in a paddock.

Background: (Rationale for why this might work)

There is currently many growers that are irrigating in a way that is not using scheduling tools but instead are using a 7 day cycle regardless of the level of stress that the cane may be under. If we can develop a low cost tool that will monitor moisture in the paddock to give real time data to allow a grower to understand his crop needs, we may be able to reduce the amount of water applied to a paddock and therefore the amount of runoff produced. This will also enable us to determine which paddocks are driest when it comes times to harvest, along with which paddocks will need irrigating first after a rainfall event.

Potential Water Quality Benefit:

If water can be applied in accordance with the crops needs as opposed to a 7 day cycle, there is the potential for applying a reduced total volume of water for the duration of the crop. This can lead to the potential for reduced runoff and more optimised irrigation efficiency.

Expected Outcome of Trial:

The expected outcome is that growers will be able to use this technology to irrigate efficiently, allowing irrigation scheduling, irrigation drydown preparation along with scheduling after irrigation events. Can also be used to determine how fast or slow irrigation events will occur.

Service provider contact: Farmacist

Where did this idea come from: Advisor

<u>Plan - Project Activities</u>	Date : (mth/year to be undertaken)	Activities :(breakdown of each activity for each stage)
Stage 1	November/ December 2016	<ul style="list-style-type: none"> • Trial Plans and direction will be developed
Stage 2	January- December 2017	<ul style="list-style-type: none"> • Development of a prototype moisture sensor
Stage 3	January 2018 – October 2018	<ul style="list-style-type: none"> • Testing of prototype sensor, update prototype based on findings • Software setup for data display
Stage 4	October 2018 – May 2019	<ul style="list-style-type: none"> • Installation of sensors on farm one • Monitoring of data and calibration against field conditions.
Stage 5	May 2019 - December 2019	<ul style="list-style-type: none"> • Installation of sensors on farm two. • Monitoring of data and calibration against field conditions.

Project Trial site details

Trial Crop:	Sugarcane
Variety: Rat/Plt:	Multiple paddocks.
Trial Block No/Name:	All paddocks of BKN-08168A
Trial Block Size Ha:	37ha
Trial Block Position (GPS):	147.353066, -19.543647
Soil Type:	BUfc, RUgb


Block History, Trial Design:

A small proportion of the farm has been EC mapped as shown below.


EC Mapping



BKN-08168A

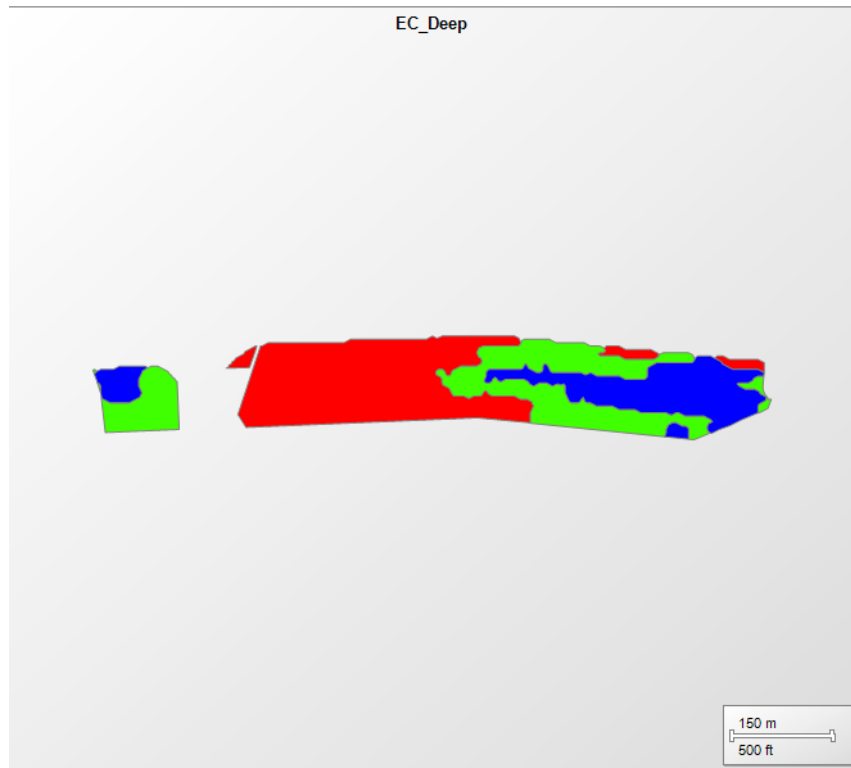

Grower:	SunRice
Farm:	BKN-08168A
Area (ha):	
Year:	2016, unri

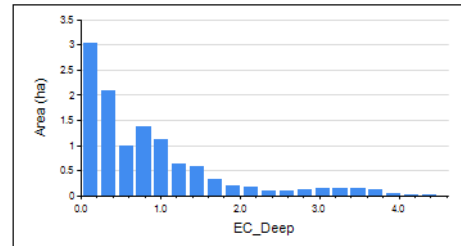

EC_Deep statistics		
Minimum:	0.004737	Maximum: 4.501
Average:	0.8685	Standard Deviation: 0.8914

EC_Deep	
0.004737 - 0.4846 (5.007 ha - 44.5%)	Red
0.4846 - 1.252 (3.569 ha - 31.7%)	Green
1.252 - 4.501 (2.676 ha - 23.8%)	Blue

05-03-2018 10:02:00

Moisture sensor Rollout

The moisture sensors will be placed in each paddock. Data will be configured to use a radio from the taggle network to send data back through to the Farmacist Connect Portal where it will be easily accessible and viewable to the grower.

Results:

As of March 2018, prototype sensors have been developed and installed for testing at Willy Lucas'. This allowed us to identify a range of issues that needed to be overcome to allow the sensors to work correctly in field conditions. The sensors were then removed, modified and reinstalled in pot trials which enabled us to test the sensors more accurately with more standardised conditions.

Small modifications were made and once confidence was gained in the data they were moved back out on farm for further testing.

Farmacost connect was configured and data is now transmitting from the selected farm back to the website for viewing individual readings and graphing the respective data.


Version 2 of the moisture sensor is planned for development which adds slightly more features and makes some small adjustments on the componentry.

Steps further will include more software development to allow the paddocks on farm to change colours based on the readings of the sensors to indicate whether it is wet or dry in a visual way.

Continual updating of the sensor with the potential to add in a second gypsum block to enable measurement of soil water content at two different depths.

A phone app is also planned which will allow growers to visualise on their phone the relative moisture content of the soil.

The below image shows the Farmacost Connect portal with the data values shown.

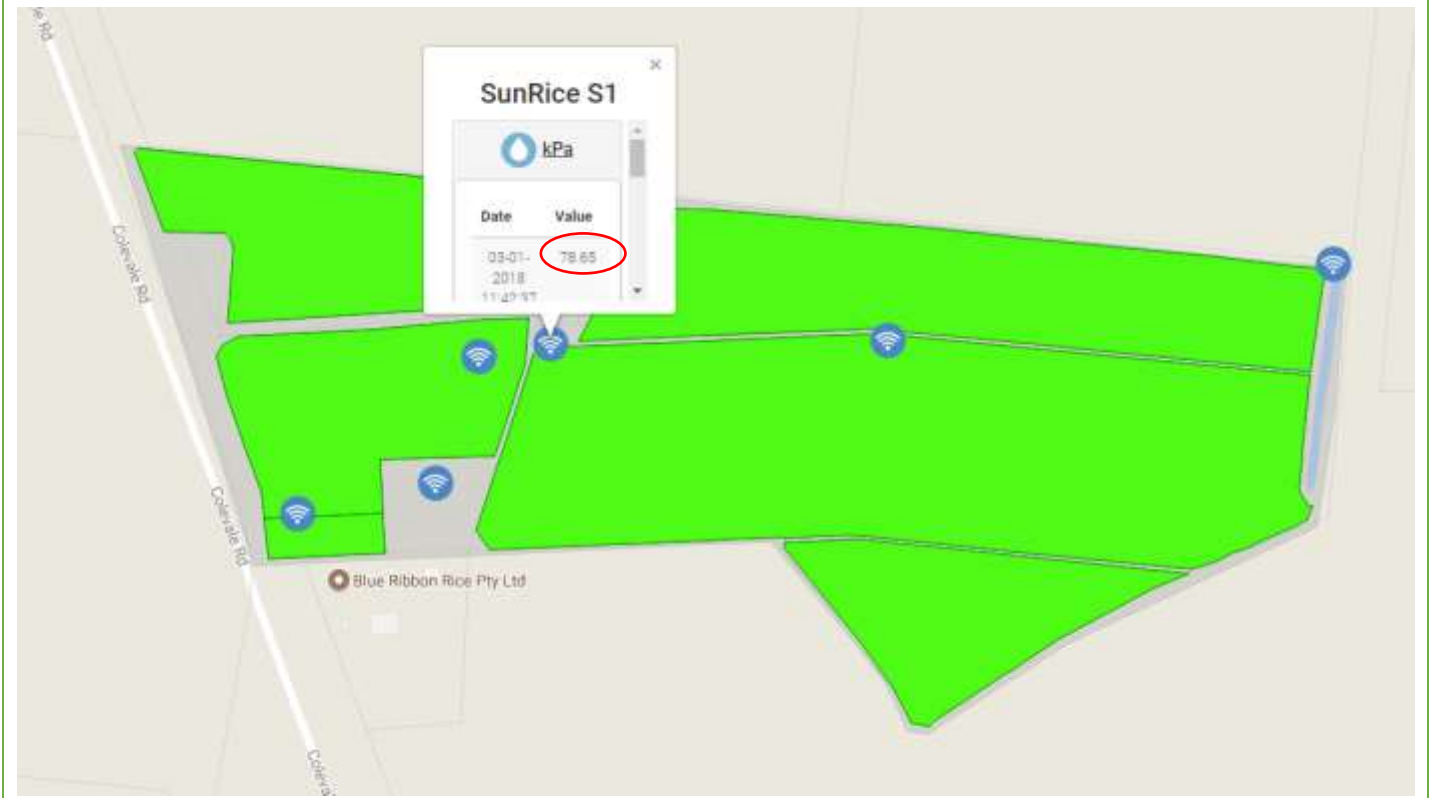



Conclusions and comments

Update November 2018

Since the last update in March 2018, the wireless Moisture sensor has been developed quite substantially. We are now fully confident in the readings that it is providing us with version 2 of the sensor proving to be a success. Housing for the electrical components has also been finalised. Two sensors have been set up on the sunrice farm in different paddocks with both moisture and temperature wirelessly logging back to our server through the taggle network. The data is currently going through a verification process to ensure it is aligned with conventional irrigation scheduling tools such as a G-DOT.


The below image is from a paddock at sunrice that is currently growing rice. It shows exact wetting and drying cycles that are happening within the paddock, with some of the drier times due to spraying events. The temperature shows small fluctuations but considering the depth of install at 10cm this is to be expected.

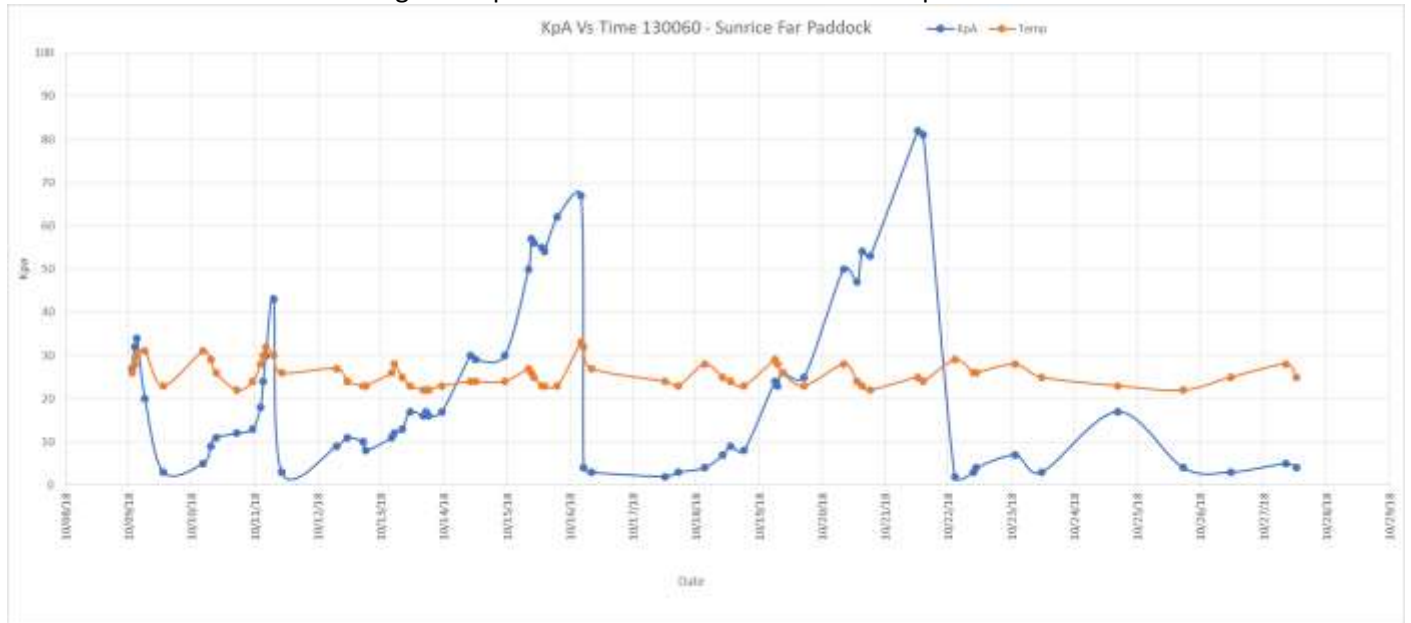

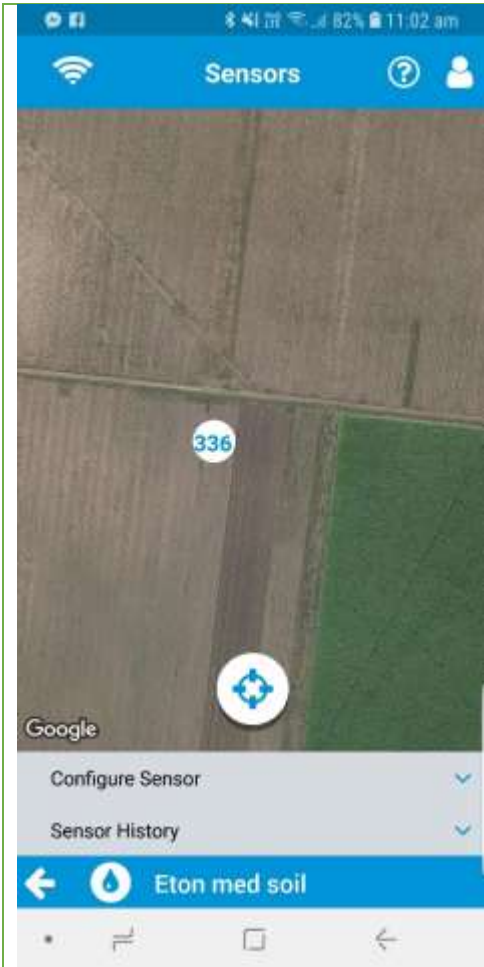


The sensors have been set up in the Farmacist Application to allow the grower to see live KPA on their phone as per example above. This is still in the development phase, with the display of the KPA being first step. Second step will be to display the data via coloured polygon.


A desktop computer program has also been created to allow growers to login and see a live moisture graph from there computer. This allows them to select the sensor that they want and view a graph over a select period of time.

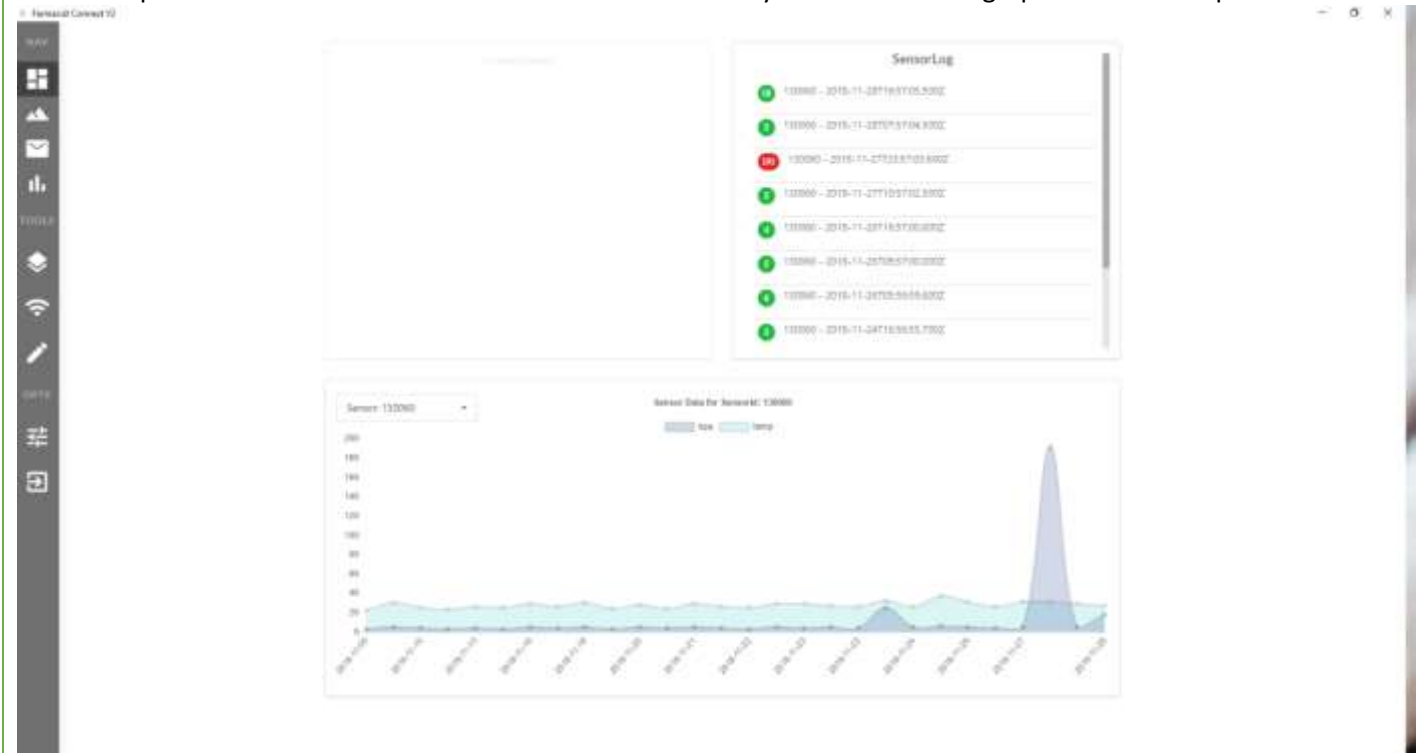


It also allows you to see the location of the sensors via a map

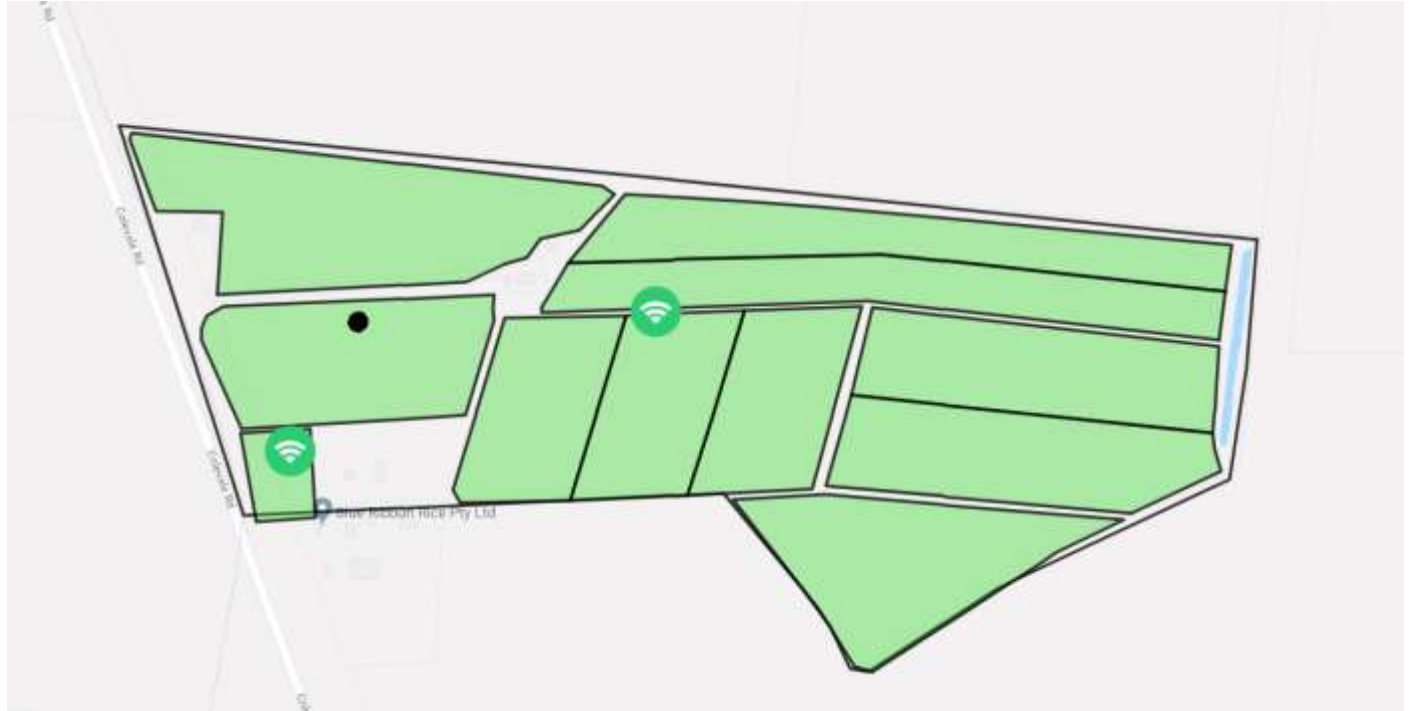


And by clicking on the sensor you are then able to see the kPa of the device.

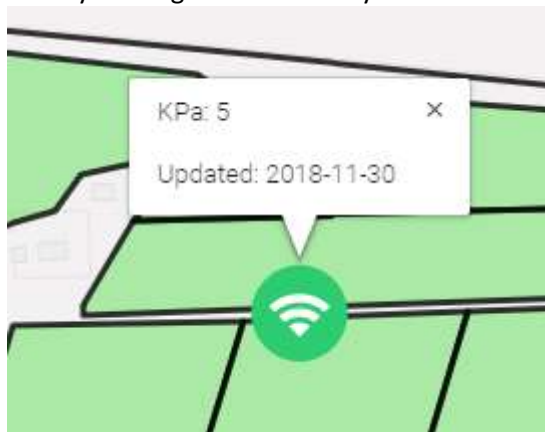

10 more sensors are now in production with an added feature which adds the user the ability to put the sensor in test mode, removing the need to open the housing when testing. Once these 10 are built, 5 will make their way to sunrice to complete the project out there with continued monitoring over the next 6 months. The other 5 will be installed on another growers farm.

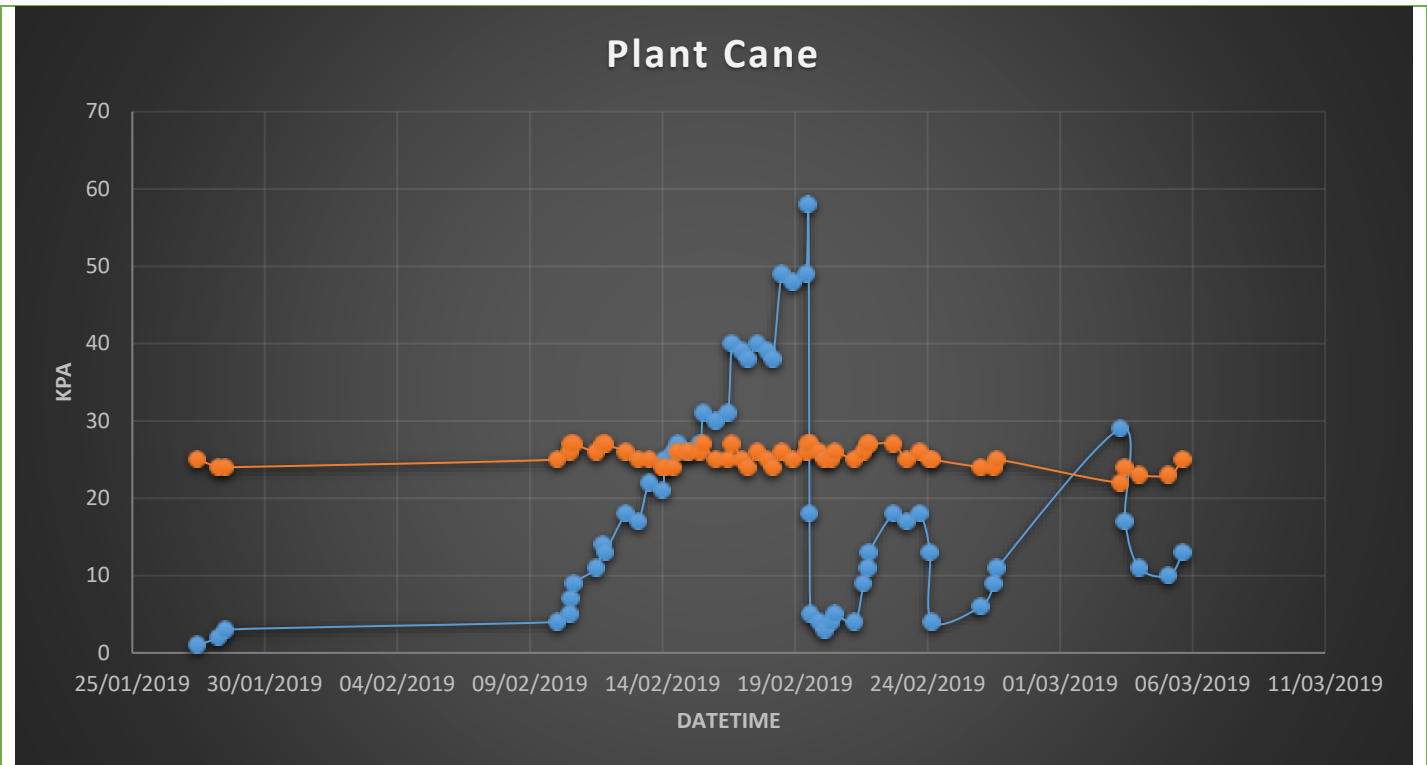


The above graph shows the recent data from 1 of 4 sensors installed on farm. Gathering data that shows the wetting up and drying down cycles of an irrigated cane crop has been difficult due to the high amount of rainfall that we have received in yr since Jan 2019 (See below). The signal strength of the sensors has been a major issue throughout the process and installation into the large cane proved difficult. The antenna was installed on a bamboo that was approximately 5mtrs tall. This was to ensure that the signal was able to reach the closest base station. Despite our best efforts in securing this it was still difficult to maintain this during the lodging of the cane and it was only just tall enough to get through to the top of the canopy.

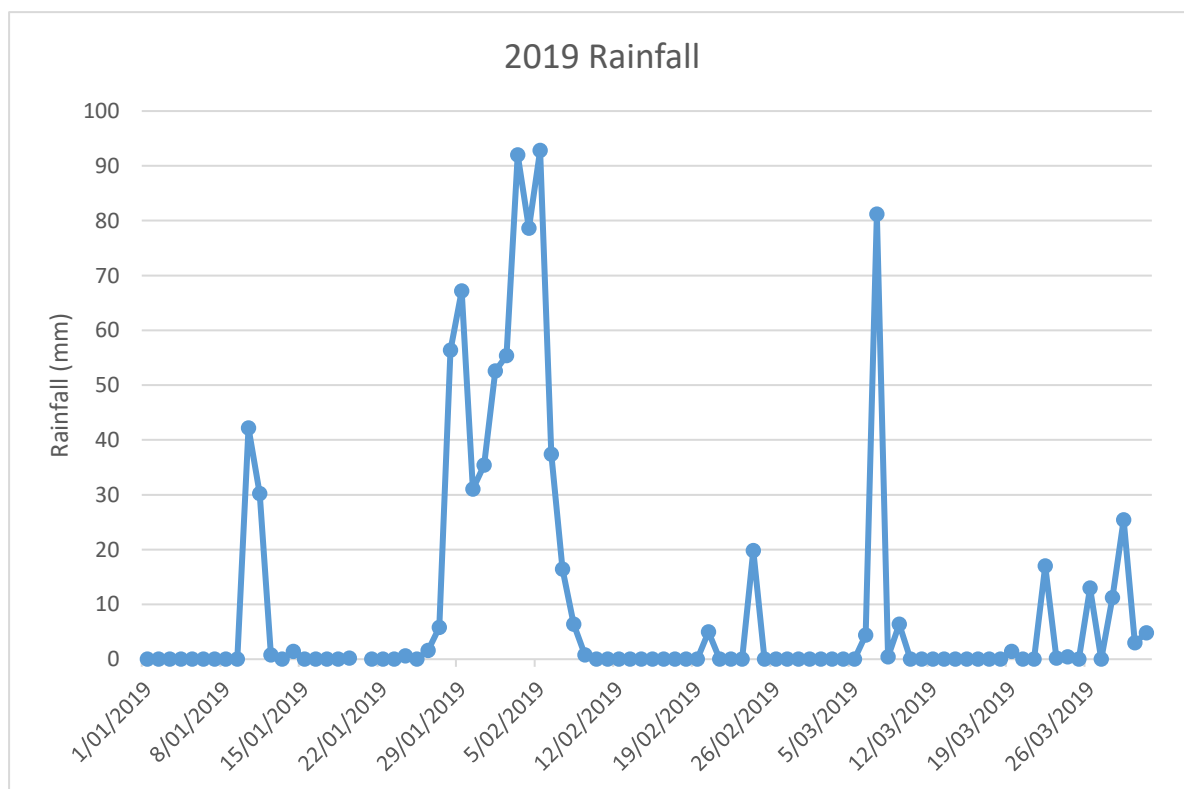

The website that is hosting the data- Farmacist Connect has had minor improvements to stability and viewing of the data since the last update. The below image shows the updated locations of the sensors that are installed on Willy's farm. Two sensors were installed into soybean paddocks whilst two were installed into plant cane.

The next steps for this innovation project is to continue gathering data to support the correct functioning of these devices and look into investigating the potential to use 3G signal coverage as opposed to radio coverage. It was noticed that whilst in the cane full service was accessed on the mobile phones even while very low in the crop canopy. Telstra have also just released their IOT package which allows for the lost cost of sensors to be produced using the Telstra network. Parts have been ordered to set this up for a test case to understand the technology and understand its suitability to the project.

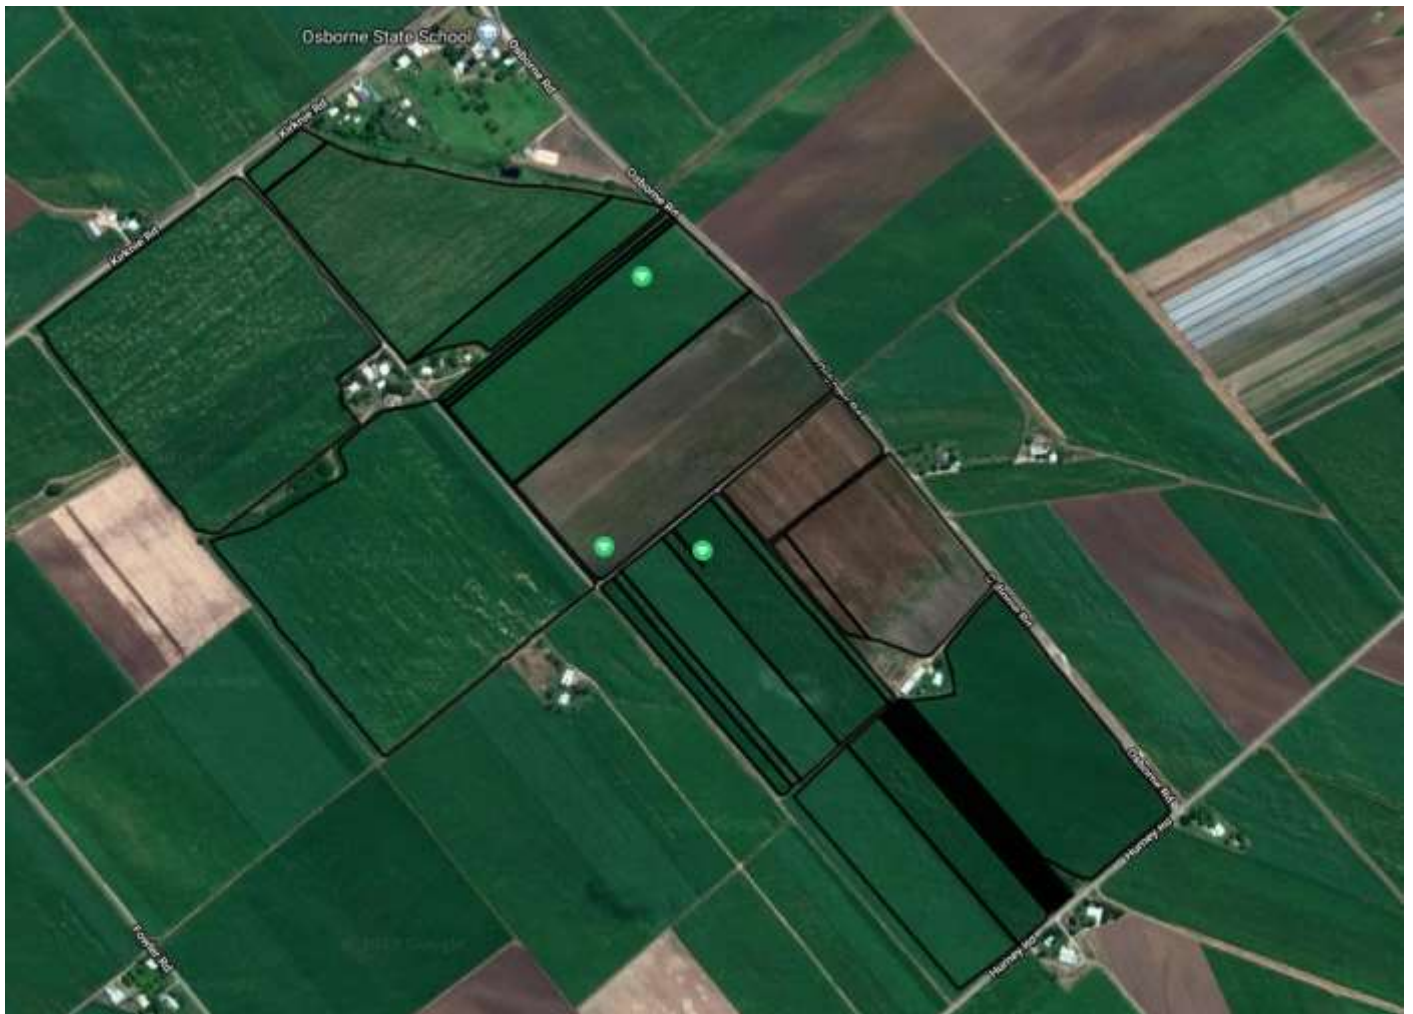



Advantages of this Practice Change:

Disadvantages of this Practice Change:

Will you be using this practice in the future:

% of farm you would be confident to use this practice :